


# Technical specifications

## Chassis

- Outside length 900 mm
- Outside width 662 mm
- Brake system acting on all four castors
- Directionally guided steering (“Steering Guide”), easily activated at the push of a button
- Castor diameter, electr. conductive  $\varnothing$  150/100 mm
- Foot control element with joystick (total, head, back, Trendelenburg up/down)
- Emergency stop button
- Optional push-aid (*e-drive*)
- With equipotential bonding connection
- Abrasion-resistant corner guards (orange) made of synthetic rubber

## Trendelenburg/Reverse Trendelenburg

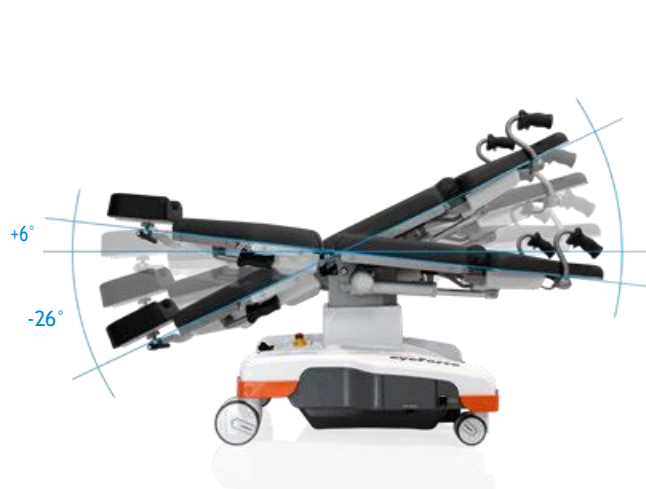

## Upper Frame

- 4-part support frame (head, back, seat, leg part)
- Removable upholstery 40 mm
- Width of upholstery 650 mm
- Standard stainless steel side rails on both sides 25 x 10 mm
- Width incl. norm rails 700 mm
- Length 1,780 - 1,900 mm

	Angle	Dimensions (L x W)
• Head part	-31° / +22°	255 x 245 mm
• Back part	0° / +75°	540 x 650 mm
• Seat part	-6° / +26°	450 x 650 mm
• Leg part	0° / -78°	510 x 610 mm
• Height adjustment		640 - 900 mm
• Entry height		580 mm
• Legroom		470 - 730 mm
• Trendelenburg	-26° / Reverse Trendelenburg	+6°

## Back part/leg part



## Electrical control

### Manual keypad

- Memory controller with 10 buttons for head, back, seat, leg part - total up/down; 2 buttons for directionally guided steering, 1 button for electronic brake, 1 easy entry button, memory button, on-off button, auto-run function
- 5 freely programmable memory positions
- Visual battery level indicator


### Foot control element

- Foot control element 2 joysticks plus activation switch
- Optional push-aid (*e-drive*)

### Electric drives

- Head, back, seat, leg part, total up/down
- Trendelenburg/Reverse Trendelenburg

## Height adjustment

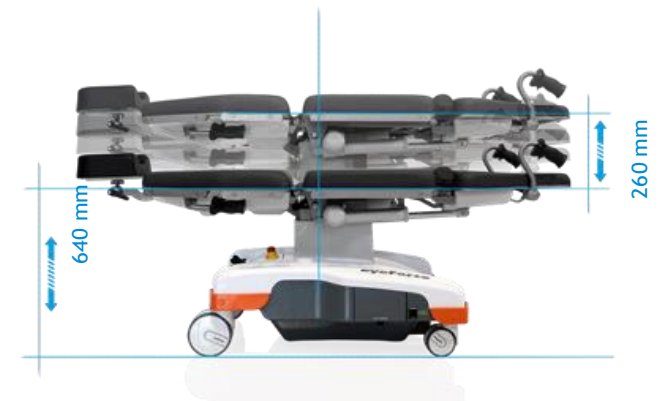

## Powerful accumulators

- Power supply-independent battery unit with 2 batteries (lead-gel), pollution free, maintenance-free, cadmium-free
- Quick-exchange battery drawer replaceable without tools
- Universal battery charger

Input: 100 - 240 V  
Output: 24 V

Operating time per battery charge

- Measured by operating circle (Prepare-Operate-Recover) 100 OPs
- Quantity of operating circles depends on individual operation

Max. load 250 kg

Weight 163 kg

Subject to technical modifications.

## Mains-free operation

Easy recharging of the equipment thanks to charging adapter and integrated battery charger circuit board.



## Simple battery replacement

An additional quick-exchange drawer (including batteries) allows you to quickly replace the rechargeable battery packs (back-up system Item No.: 3339 0000).



## Equipment protection

### Cover drape *stayClean*

2,000 x 730 mm, box á 160 Pieces  
4 x 40 Pieces Item No.: 3034 0014

Page 64



## Color card

Standard color

anthracite Item No.: 3037 0052

“Tundra skai”  
Page 102

“Pandoria Plus”  
Page 103

